




# GREEN ENVIRONMENT

FIVE YEAR  
**5**  
WARRANTY




NEW  
LIGHTING SYSTEM

# T-ECO LED LIGHT

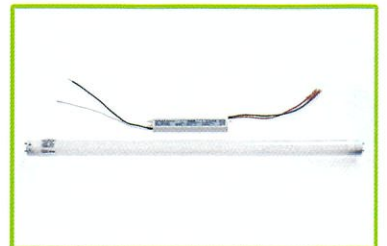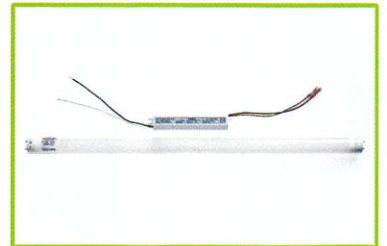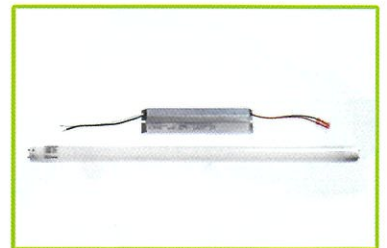





Daylight specification		Type	
Classification	Power W	3500K	2700K
Mounting style	40mm	40mm	40mm
Product size	Φ22	Φ22	Φ22
Power supply	AC	AC	AC
Power consumption	11.5W (9.5)	22W (19)	24W (22)
Total luminous flux	1,050lm	2,150lm	2,500lm
View angle	230°	230°	230°
Color temperature	3500K	3500K	3500K
Color rendering index	RA85	RA85	RA85
Operating temperature	-25~50°C	-25~50°C	-25~50°C

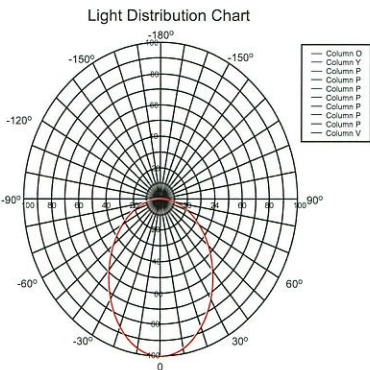

### LED Portable Floodlight

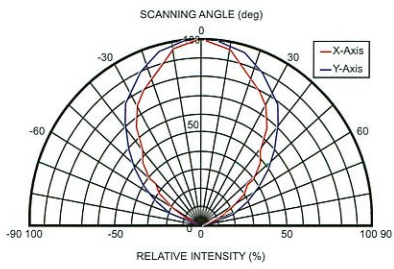

### Mini Spotlight

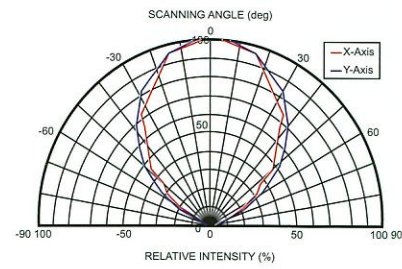

Color Temperature	Soft/Warm	Medium	Cool	Daylight
Kelvin Range	2700K	3500K	4100K	6500K
Associated Effects and Moods	Friendly Intimate Personal Exclusive	Friendly Inviting Non-threatening	Neat Clean Efficient	Bright Alert Replicates natural sunlight
Appropriate Applications	Restaurants Hotel lobbies Boutiques Libraries Office areas Retail stores	Public reception areas Showrooms Bookstores Office areas	Office areas Conference rooms Classrooms Mass merchandisers Hospitals	Galleries Museums Jewelry stores Medical examination areas Printing companies

Photometry	Conditions	Unit	Model	
			Mini Spotlight	LED Portable Floodlight
Total luminous Flux	1 min	lm	2374	2165
	30 min	lm	2273	2192
Illuminance directly under	1 m	lx	927	919
	2 m	lx	230	229
	3 m	lx	104	102
	4 m	lx	58	58.2
	5 m	lx	37.4	37.7

### Product Specification

ITEM	Medium LSBL-20**	Medium LSBL-40**	High LSBL-40**	Medium LSBL-110**	High LSBL-110***
Type	20W	40W	40W	110W	110W
Luminous Flux (lm)	1,050	2,150	2,500	4,300	6,000
Illumination	1 m (lx)	200	300	420	800
	2 m (lx)	55	110	125	300
View Angle	230°				
Color Temperature CCT K	5000 K				
Color Rendering Index (CRI)	RA 85%				
Socket	G 13				
T8 Tube	Size (mm)	600 x Ø 30	1,198 x Ø 30	2,367 x Ø 30	
	Weight (g)	180	370	700	900
Power Supply Unit	Input	Voltage: Ac100 ~ 240V		Frequency : 50/60Hz	
	Consumption (W)	11.5(9.5)	22(19)	24(22)	44(38) 55(48)
LED Life Span	50,000 hours				
Operating Environment	Temperature: -25~50°C		Humidity: 5~95% (during operating)		
Product Dimension (mm)					
Installation Instruction					

## PARKING



## INDUSTRIAL



## OFFICE



### LESEN PENSIJILAN BARANGAN Product Certification Licence



**IRIACHI (MALAYSIA) SDN. BHD.** (Company No.: 177418-A)

**Headquarter** : Plot 507, Tingkat Perusahaan Empat, Prai Free Industrial Zone, 13600 Prai, Penang, Malaysia.

Tel: 04-3999801/2/3 Fax: 04-3992443, 3975696

**Perlis Branch** : Lot 1065, 1067 & 767, Kawasan Perindustrian Kuala Perlis, 02000 Kuala Perlis, Perlis Indera Kayangan.

Tel: 04-9851828-35 Fax: 04-9851798, 9851799

